





**PROADAS** is the universal modular system developed for check and **calibration of driver assistance systems** (front sensors), **check of the alignment status** and **complete wheel alignment service** (optional) on multi-brand vehicles and commercial vehicles.



• Quick, accurate and user-friendly • **Compliant** with the procedures of vehicle manufacturers • Meets the needs of: • mechanical workshops, • body shops, • car glass repairers, • wheel specialists 6





Maximum precision and accuracy thanks to the integrated technology, Optical sensors and contactless distance sensors

## PRECISION



TELEC

ELO (5 dl 8)

720/0/5


 Immediate system positioning thanks to the information communicated in real time by the integrated wireless devices (PATENT PENDING).

#### • Error-proof.

The software contains the **preloaded** positioning values. It displays the point where it is and **guides** the system in its operations.

## ACCURATE ADJUSTMENT





65

#### Operator immediately productive!

Simplified procedures within the software guide the operator step by step in the alignment and calibration of the ADAS REPARAZIONE VEICOLO (3 di 8) system

PROCEDURA &

AZIONE TELECA

الله ا ((QR) NRUDIT | 8105 I W

FOSIZIONARE SUPPORTO RUOTE ANTERIORI

# PLUG & PLAY

720/0/5

## WHEEL ALIGNMENT CHECK



+04.00-

00.30

\*00.17

\*00.25

00.00

100.00

+04.25-

00.570

+00-25-

00.00

+04.50

00.57

+00.170

- Using the **Optical sensors** it is possible to check the **alignment status of the vehicle**
- It is possible to convert the PROADAS into a complete wheel alignment service station. (Optional)

## COMPLETE WHEEL ALIGNMENT SERVICE

Assale Anteriore

100


00.33

+04.00

+04.50

00.50


100.00

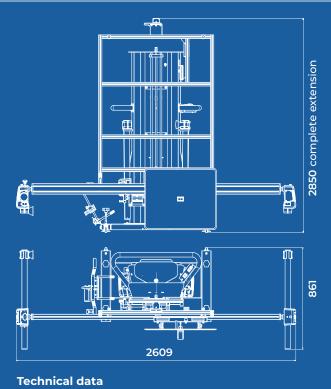

Maximum dimensions: Width 2609mm Depth 861mm Height 2850mm Weight 142kg



- Incoming vehicle status
- PROADAS positioning registration
- Outgoing vehicle status
- Wheel alignment check
- Wheel alignment registration (optional)

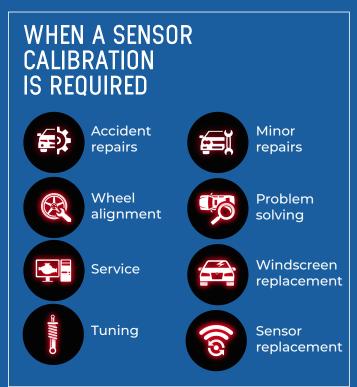



-

Compatibility with vehicles positioned on lift or another structure, the software compensates the offset of the levelled surface on which the vehicle is placed

Compatibility with CCD/CMOS wheel aligners manufactured by HPA-FAIP (check year of manufacture and model); after completing the vehicle alignment it is possible to perform an ADAS calibration by launching the calibration software procedure and aligning the system using the Optical sensors of the wheel aligner and the wireless distance sensors



## WE CALIBRATE SAFETY





watch the video





hpa-faip.it